



Features

- Extremely quiet
- Excellent reliability
- Compact and easy to use
- Easy maintenance
- Long-life, 2-year warranty
- 50% duty cycle

Description

- 5µm air filtration
- Pressure regulator included
- 5-year warranty on receiver


Accessories

- 0.01µm filtration
- Receiver autodrain system
- Condensate bottle


Product Specifications

| Model | 6-4 | | |
|-----------------|----------|-------|-------|
| Voltage | V | 1x230 | 1x120 |
| Frequency | Hz | 50 | 60 |
| Motor | HP | 0.46 | 0.54 |
| | kW | 0.34 | 0.4 |
| Displacement | l/min | 50 | 60 |
| Air flow @ 8bar | l/min | 32 | 37 |
| | cfm | 1.13 | 1.31 |
| Max. pressure | bar | 8 | 8 |
| | psi | 120 | 120 |
| Max. current | A | 2.9 | 6.2 |
| | | | |
| Receiver volume | litres | 4 | 4 |
| | gallon | 1.1 | 1.1 |
| Weight | kg | 18 | 18 |
| | lbs | 40 | 40 |
| Noise level | dB(A)/1m | 45 | 45 |
| Duty cycle | | 50% | 50% |

Air flow / pressure curve

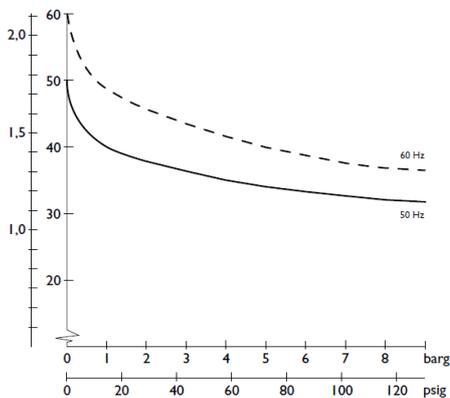

Dimensions - mm / [inches] *

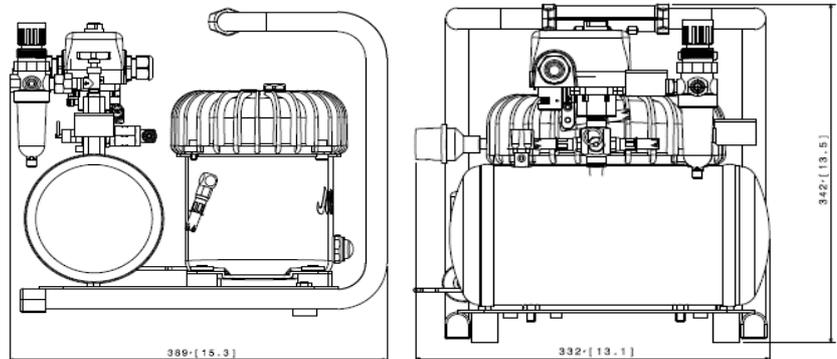

* for unit without accessories